


REQUEST FOR BIDS

WEST PARKING LOT PATCHING, MICROSURFACE, AND CRACK SEALING

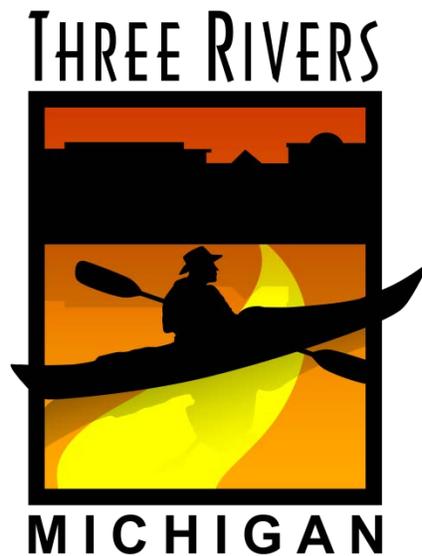

Department of Public Services

1015 S Lincoln Avenue

Three Rivers, MI 49093

(269) 273-1845

Table of Contents

Asphalt Microsurface/Asphalt Patching	3
Performance Bids.....	3
I. Instructions	3
II. Conditions Applicable to Bids.....	3
Specifications for Micro Surface	4
Part 1 – General	4
Part 2 –Products.....	4
<i>Traffic Control</i>	4
<i>Weather Limitations</i>	5
<i>Timing Limitations</i>	5
Bid Form.....	6
Project Overview.....	7

Asphalt Microsurface/Asphalt Patching

Performance Bids

The City of Three Rivers is committed to the concept of performance bids. All vendors are encouraged to submit bids which conform to the stated specifications, as well as, suggest deviations from the specifications, which in the vendor's opinion would be beneficial to the City in terms of price and performance. The City reserves the right to accept or reject any bid under these terms.

I. Instructions

- A. Bids must be typewritten or clearly printed in ink and signed by a duly-authorized representative of the firm submitting the quote.
- B. Bids must be submitted in sealed envelopes, clearly marked on the outside, "**Bids for West Parking Lot Microsurface**".
- C. Bids will be received by the Office of the City Clerk, City Hall, 333 West Michigan Avenue, Three Rivers, Michigan, 49093, until **2:00 p.m. local time, Thursday, March 24, 2016**. All bids will be date stamped and time marked when received.
- D. Faxed or emailed bids shall not be accepted.

II. Conditions Applicable to Bids

- A. Applicable Laws: The Ordinances and Charter of the City and laws of the State of Michigan concerning competitive bidding, contracts and purchases will be employed.
- B. Taxes: The City of Three Rivers is generally exempt from Federal Excise and Michigan State Sales Tax. Prices should not include tax.
- C. If the bidder elects to deviate from the specifications stated, all exceptions or other changes must be clearly noted.
- D. The City reserves the right to reject any and all bids, waive informalities or defects in bids, or accept such bids as it shall deem to be in the best interest of the City of Three Rivers.
- E. The City does not discriminate on the basis of race, color, national origin, sex, religion, age or disability in employment or the provision of services.
- F. The Contractor shall provide proof of Liability and Workman's Compensation Insurance and a completed W-9 form with this bid.
- G. The successful bidder shall provide the City with a copy of this liability insurance policy in the amount of \$2,000,000 (Two million Dollars) which names the City of Three Rivers as second insured.
- H. Final completion of this project shall be no later than **May 27, 2016**. This is a fixed deadline due to the festival that occurs in the parking lot in June.

Specifications for Micro Surface

Part 1 – General

References

All materials, equipment and traffic control measures shall conform to the current Michigan Department of Transportation (MDOT) “Standard Specifications for Construction” and MDOT “Manual of Uniform Traffic Control Devices” as well as the latest edition of the “American Society of Testing Materials” (ASTM).

Scope

This micro surface work shall consist of the application of an admixture of a polymer modified asphaltic emulsion, aggregate, mineral filler, set control additives and water. This admixture shall be properly proportioned, mixed, and applied on a surface prepared by the Contractor. The Contractor shall also coordinate or perform the following: traffic control, surface marking installation, and asphalt crack routing and sealing.

Measurement and Payment

The following are the measurements which shall be used for payment.

1. Micro Surface – Units shall be by the square yard.
2. Infra Red plate heating and repair shall be by the square foot.
3. Crack cleaning and sealing shall be by the linear foot.
4. Hot mix patching (prior to micro surface) shall pay by the ton.
5. Surface Marking (Removal and Installation) shall be as stated in the bid document.

The project includes the entire west parking lot including both access points to the roadways.

Part 2 –Products

Surface Preparation

Prior to placing the micro surface mixture the Contractor shall perform the following:

1. Infra red plate heating and repair in only the designated areas.
2. Removal of all loose materials, vegetation, dirt, mud, animal remains, animal feces, oil, grease or other deleterious materials from the surface. The entire surface shall be thoroughly swept prior to placing the micro surface. The cracks shall be thoroughly routed as necessary and blown clean prior to crack filling.
3. All areas designated by the City shall be filled with hot mix asphalt and rolled.
4. All painted or thermo plastic traffic markings shall be removed by the Contractor or his sub contractor.

Traffic Control

The Contractor shall not allow traffic on the micro surface until it is sufficiently cured to prevent pickup or displacement by the turning movement of vehicle tires. The Contractor shall repair any damage by traffic to the applied micro surface at no expense to the City of Three Rivers.

The contractor shall work closely with the City to coordinate all work in the roadway.

Weather Limitations

The micro surface shall be placed when the air and surface temperatures are at least 7° C and rising. Placement is not allowed if there is rain or threatening weather nor if the temperatures are forecasted to be below 0° C within 24 hours of the time of work.

Timing Limitations

This is a heavily utilized parking lot. Close coordination with the City shall occur to insure that the lot is closed for the least amount of time.

Application Rates:

Application shall be at or above the minimum rate of 20 lb. per square yard for all sections

Bid Form

The undersigned having familiarized (himself/themselves) with the local conditions affecting the cost of the work and the Contract Documents hereby proposes to perform everything required to furnish all labor, materials, necessary tools, equipment, utility and transportation services necessary to perform and complete in a workmanlike manner all work required for Micro surfacing in accordance with the specifications as prepared by the Department of Public Services, City of Three Rivers, Michigan, for, including Addenda No. ____ issued thereto, the following unit prices:

COMPANY _____

ADDRESS _____

CITY _____ STATE _____ ZIP CODE _____

SIGNATURE _____ TITLE _____

TELEPHONE _____ DATE _____

West Parking Lot Microsurfacing

Item No.	Item Description	Quantity	Unit	Unit Price	Total Price
1	Mobilization (maximum \$500)	1	LS		
2	Traffic Control (maximum \$250)	1	LS		
3	Microsurface parking lot	5700	SY		
4	Patching	5	TON		
5	Cracksealing	5000	LF		
6	Pavement Marking 4" Yellow	2132	LF		
7	Pavement Marking RR Crossing	1	EA		
Bid Total					

Project Overview



— Microsurface area

City of Three Rivers West Parking Lot Microsurface

Drawing created by the City of Three Rivers
Department of Public Services
March 6, 2016

Scale
1"=50'
Line scales 1" when printed to scale